


# 325BU Lithium Ion Battery Burnisher

## SERIOUS FLOOR CARE



# Double the Horsepower

- 5 HP Motor
- Consistent Power
- 100% Uniform Pad Pressure
- Maintains RPM Regardless of Battery Charge
- Propane-Like Performance
- Increased Productivity

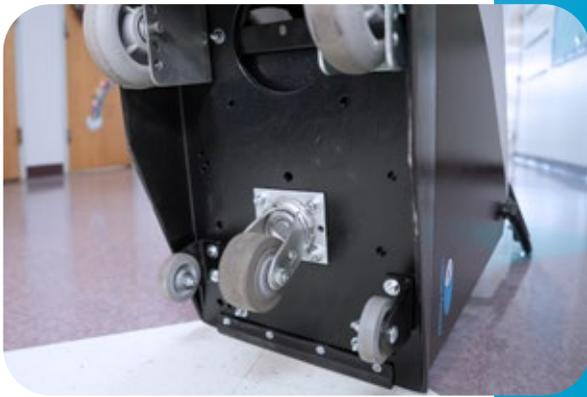

Pivoting Rear Wheel for Increased Maneuverability



Easy Pad Change



# Serious Savings

- 5-Year Battery Warranty
- 60% Fewer Parts than Conventional Battery Burnishers
- Rigid Cast Aluminum Deck
- Lower Repair Cost



No Battery Replacements

+



No Service Downtime

=



Lower Cost of Ownership

# Unmatched Performance

- Zero Emissions
- Easy Charging
- Non-Memory Forming Battery
- Quiet Operation <70dBA
- 66% Lighter than Conventional Battery Burnishers

## Telematics with

- Key Information at a Glance
- GPS Tracking
- First Year Included with Purchase

## Optional Active Vacuum with HEPA Filter



## SPECIFICATIONS

	325BU21LI	325BU21LIAV	325BU28LI	325BU28LIAV
<b>Burnishing Width</b>	21" (53 cm)	21" (53 cm)	28" (71 cm)	28" (71 cm)
<b>Productivity Rate</b>	25,000 ft <sup>2</sup> /hr (2300 m <sup>2</sup> /hr)	25,000 ft <sup>2</sup> /hr (2300 m <sup>2</sup> /hr)	34,000 ft <sup>2</sup> /hr (3160 m <sup>2</sup> /hr)	34,000 ft <sup>2</sup> /hr (3160 m <sup>2</sup> /hr)
<b>Voltage</b>	36V	36V	36V	36V
<b>Overload Protection:</b>	Resettable breakers	Resettable breakers	Resettable breakers	Resettable breakers
<b>Battery Type</b>	1 x 36V LFP 173AH			
<b>Operating Time</b>	2.5 - 3 hours			
<b>Onboard Battery Charger</b>	Standard	Standard	Standard	Standard
<b>Circuit Protection</b>	80-amp circuit breaker	80-amp circuit breaker	80-amp circuit breaker	80-amp circuit breaker
<b>Motor HP Continuous (Intermittent)</b>	5 (8)	5 (8)	5 (8)	5 (8)
<b>Pad Speed - w/Load</b>	2000 rpm	2000 rpm	1550 rpm	1550 rpm
<b>Adjustable Pad Pressure</b>	35-60 lbs (15.9-27.2 kg)	35-60 lbs (15.9-27.2 kg)	45-70 lbs (20.4-31.8 kg)	45-70 lbs (20.4-31.8 kg)
<b>Pad Driver</b>	Repairable, flex-center, rigid outer	Repairable, flex-center, rigid outer	Repairable, flex-center, rigid outer	Repairable, flex-center, rigid outer
<b>Pad Counterbalance</b>	Steady machine pivot	Steady machine pivot	Steady machine pivot	Steady machine pivot
<b>Dust Collection</b>	Passive vac	Active HEPA vac	Passive vac	Active HEPA vac
<b>Noise Level</b>	67 db(A)	67 db(A)	68 db(A)	68 db(A)
<b>Vibration Level (m/s<sup>2</sup>)</b>	< 2.5 mm/sec <sup>2</sup>			
<b>Frame</b>	Permanent mold cast aluminum			
<b>Cover</b>	1/4" polyethylene	1/4" polyethylene	1/4" polyethylene	1/4" polyethylene
<b>Wheels</b>	6" non-marking with sealed ball bearing			
<b>Pad Size</b>	21" (53 cm)	21" (53 cm)	28" (71 cm)	28" (71 cm)
<b>Dust Filtration</b>	Reusable cloth bag	Disposable paper bag with H13 HEPA filter	Reusable cloth bag	Disposable paper bag with H13 HEPA filter

## WARRANTY

<b>Battery</b>	5 years	5 years	5 years	5 years
<b>Deck &amp; Battery Cover</b>	3 years	3 years	3 years	3 years
<b>Parts</b>	3 years	3 years	3 years	3 years