



EnviroStar™

HS25 FLOOR COATING



EnviroStar HS25 is a high solids premium green floor coating designed specifically for ease of application and maintenance while consistently providing a beautiful, durable, and safe wet-look shine.

DIRECTIONS

Read all directions and Safety Data Sheets (SDS) before using.

1. For a floor that has been stripped*, properly neutralized, rinsed and allowed to dry thoroughly, apply 5-6 thin coats using a clean synthetic mop. Allow the floor to dry thoroughly between coats and prior to burnishing.
2. Optional: Apply 2 thin coats of floor sealer for old or porous floors or for high traffic areas, then apply 4 coats of finish.
3. For a floor that has been deep scrubbed and allowed to dry thoroughly, apply 1-2 thin coats using a clean synthetic mop. Allow floor to dry thoroughly between coats and prior to burnishing.


*Note: Stripped with EnviroStar Floor Stripper.

PRODUCT INFO

Product Code	124FS	124MPE
Volume	2.50 US gallons	4 liters
Shipping Package	2 x 2.5 gallons	4 x 4 liters
Pallet Quantity	48	48

Ensure adequate room ventilation. Personal protective equipment not required with normal use. Refer to the product SDS for additional recommendations. Dispose of contents/container in accordance with local/ regional/national/international regulations. Please recycle bottle in accordance with state and local regulations.

SURFACES

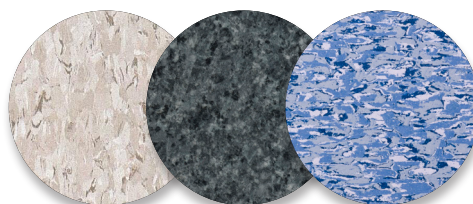

VCT

LINOLEUM

MARMOLEUM

TECHNICAL DATA

Description	Polymer emulsion
Appearance	Milky white
Specular Gloss (60°) ASTM D1455-87 (2008)	>85
Viscosity (Brookfield) @ 68°F (20°C)	<10 centipoise
Coverage Rate	2500 to 3000 ft ² /gal 61 to 74 m ² /liter
Dry Time	About 30 minutes
Buffability	Excellent wet-look
Removability ASTM D1792-06	Excellent
VOC 40 CFR Part 59 Subpart C	0.7%
Non-Volatile Solids ASTM D2834-95 (2008)	25%
Fragrance	Faintly acetic (non-ammoniated)
Slip Resistance ULTM410	Meets requirements
Shelf Life ASTM D1791-93 (2008)	1 year
Density ASTM D1475-98 (2008)	8.6 lb/gal @ 68°F 1.03 kg/L @ 20°C
Detergent Resistance ASTM D3207-92 (2008)	Excellent
Freeze/Thaw ASTM D3209-93 (2008)	Passes 3 cycles
Container	2.5 US gal/9.5 L (FS packaging) 1.06 US gal/4 L (MPE packaging)



This product meets Green Seal™ Standard GS-40 based on effective performance and protective limits on VOCs and human & environmental toxicity. GreenSeal.org.



Floor Coating and Finishing materials as to slip resistance only.

42E6

CARB
Compliant

