



# OmniGuard™

UHS FLOOR COATING



For high traffic areas that require a durable and easy to maintain surface, **OmniGuard** is the obvious choice. The high solid formulation of this UHS floor finish produces extreme gloss that withstands the effects of crowded market places in any weather condition.

## DIRECTIONS

Read all directions and Safety Data Sheet (SDS) before using.

1. For a floor that has been stripped, properly neutralized, rinsed and allowed to dry thoroughly, apply 3-5 thin coats of floor finish using a clean synthetic mop. Allow the floor to dry thoroughly between coats and prior to burnishing. Optional: Apply 2 thin coats of floor sealer for old or porous floors or for high traffic areas, then apply 1-3 coats of finish.
2. For a floor that has been deep scrubbed and allowed to dry thoroughly, apply 1-2 thin coats of floor finish using a clean synthetic mop. Allow floor to dry thoroughly between coats and prior to burnishing.

## PRODUCT INFO


**Product Code** 141L5

**Volume** 5 liters

**Shipping Package** 2 x 5 liters

**Pallet Quantity** 64 cases

## SURFACES

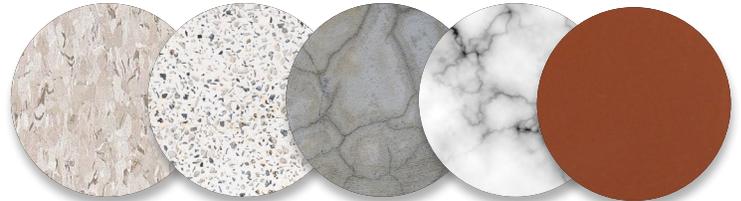

VCT

TERRAZZO

CONCRETE

MARBLE

QUARRY TILE

## TECHNICAL DATA

<b>Description</b>	Polymer emulsion
<b>Appearance</b>	Milky white liquid
<b>Specular Gloss (60°)</b> ASTM D1455-87 (2008)	>85
<b>Viscosity</b>	< 10mPa.s (dynamic)
<b>Coverage Rate</b>	61 to 74 m <sup>2</sup> /liter
<b>Dry Time</b>	about 25 minutes
<b>Buffability</b>	Excellent
<b>Removability</b> (ASTM D1792-06)	Excellent
<b>VOC</b>	6,93%
<b>Non-volatile solids</b> ASTM D2834-95 (2008)	25%
<b>Fragrance</b>	Mild odor, no fragrance added
<b>Slip Resistance</b> ASTM D2047-11	Meets requirements
<b>Shelf Life</b> ASTM D1791-93 (2008)	1 year
<b>Density</b> ASTM D1475-13 (2008)	1,03 kg/liter
<b>Detergent Resistance</b> ASTM D3207-92 (2008)	Excellent
<b>Freeze/Thaw</b> ASTM D3209-93 (2008)	Passes 3 cycles

