



Eclipse™ Low Odor Stripper

FLOOR STRIPPER



Eclipse Low Odor Stripper is an extra strength floor stripper, formulated for use in environments such as hospitals or 24 hour retail facilities, where strong odors may be problematic.

DIRECTIONS

Read all directions and Safety Data Sheets (SDS) before using.

- Mix stripper per the following dilutions:
Heavy coating removal: 1:6 (21.5 US oz per gallon/166 ml per 1 liter of cold water).
Normal coating removal: 1:8 (16 US oz per gallon/125 ml per 1 liter of cold water).
Light coating removal: 1:10 (13 US oz per gallon/100 ml per 1 liter of cold water).
- Apply solution liberally to the floor and allow to soak for 10 minutes ensuring the solution does not dry.
- Scrub floor with automatic scrubber or stripping machine. Pick up dirty solution with automatic scrubber or wet vac.
- Rinse thoroughly with clean water and allow floor to dry completely before applying any finish.

NOTE: Test floor for color fastness in an inconspicuous area.

PRODUCT INFO


Product Code 510FSE

Volume 10 liters

Shipping Package 2 x 10 liters

Pallet Quantity 48

SURFACES

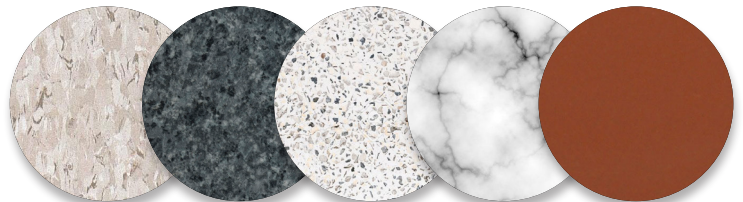

VCT

LINOLEUM

TERRAZZO

MARBLE

QUARRY
TILE

TECHNICAL DATA

Description Non-butyl, low odor stripper

Appearance Clear red liquid

Viscosity (Brookfield) <5 centipoise
@ 68°F (20°C)

Flash Point >200°F (93°C)
ASTM D56-05 (2010)

pH 12.4 (as supplied)
ASTM E70-07

VOC 15% (as supplied)
40 CFR Part 59 Subpart C

2.20% (1:6)

1.71% (1:8)

1.40% (1:10)

Fragrance None added

Shelf Life 2 years
ASTM D1791-93 (2008)

Freeze/Thaw Passes 3 cycles
ASTM D3209-93 (2008)

Density 8.7 lb/gal @ 68°F
ASTM D1475-98 (2008)

1.04 kg/L @ 20°C

Container 2.64 US gal/10 L (FSE packaging)

