



EZ-Strip is an extra strength floor stripper formulated for use in environments where slow-drying stripping procedures are required.

DIRECTIONS

Read all directions and Safety Data Sheets (SDS) before using.


- Mix stripper per the following dilutions:
Heavy coating removal: 1:4 (32 US oz per gallon/250 ml per 1 liter of water).
Normal coating removal: 1:6 (21.5 US oz per gallon/166 ml per 1 liter of water).
Light coating removal: 1:8 (16 US oz per gallon/125 ml per 1 liter of water).
- Apply solution liberally to the floor and allow to soak for 10 minutes ensuring the solution does not dry.
- Scrub floor with automatic scrubber or stripping machine. Pick up dirty solution with automatic scrubber or wet vac.
- Rinse thoroughly with clean water and allow floor to dry completely before applying any finish.

NOTE: Test floor for color fastness in an inconspicuous area.

PRODUCT INFO

| | | |
|-------------------------|-----------------|------------------|
| Product Code | 517FS | 517MP |
| Volume | 2.50 US gallons | 1.06 US gallons |
| Shipping Package | 2 x 2.5 gallons | 4 x 1.06 gallons |
| Pallet Quantity | 48 | 48 |

SURFACES

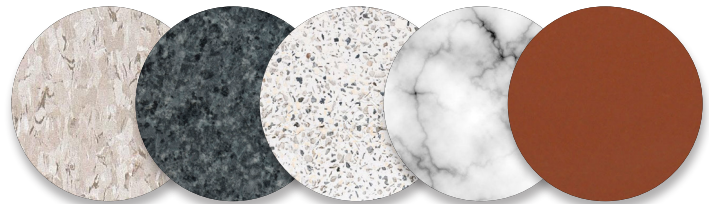

VCT

LINOLEUM

TERRAZZO

MARBLE

QUARRY
TILE

TECHNICAL DATA

| | |
|--|---|
| Description | Low odor stripper |
| Appearance | Clear liquid |
| Viscosity (Brookfield) @ 68°F (20°C) | <10 centipoise |
| Flash Point ASTM D56-05 (2010) | >200°F (93°C) |
| VOC 40 CFR Part 59 Subpart C | 25.7% (as supplied) 5.1% (1:4) 2.8% (1:8) |
| pH ASTM E70-07 | 12.5 (as supplied) |
| Fragrance | None added |
| Shelf Life ASTM D1791-93 (2008) | 2 years |
| Density ASTM D1475-98 (2008) | 8.8 lb/gal @ 68°F 1.05 kg/L @ 20°C |
| Freeze/Thaw ASTM D3209-93 (2008) | Passes 3 cycles |
| Container | 2.5 US gal/9.5 L (FS packaging) 1.06 US gal/4 L (MP packaging) |