



EnviroStar Hard Floor Coating is a polyurethane-fortified acrylic co-polymer floor coating for concrete, stone and similar hard floor surfaces. This water-based formula is ideal for less frequent maintenance programs.

DIRECTIONS


Read all directions and Safety Data Sheets (SDS) before using.

1. For a floor that has been stripped, properly neutralized, rinsed and allowed to dry thoroughly, apply 5-6 thin coats using a clean synthetic mop. Allow the floor to dry thoroughly between coats and prior to burnishing.
2. Optional: Apply 2 thin coats of floor sealer for old or porous floors or for high traffic areas, then apply 4 coats of finish.
3. For a floor that has been deep scrubbed and allowed to dry thoroughly, apply 1-2 thin coats using a clean synthetic mop. Allow floor to dry thoroughly between coats and prior to burnishing.

PRODUCT INFO

Product Code	128FS	128MPE
Volume	2.50 US gallons	4 liters
Shipping Package	2 x 2.5 gallons	4 x 4 liters
Pallet Quantity	48	48

SURFACES

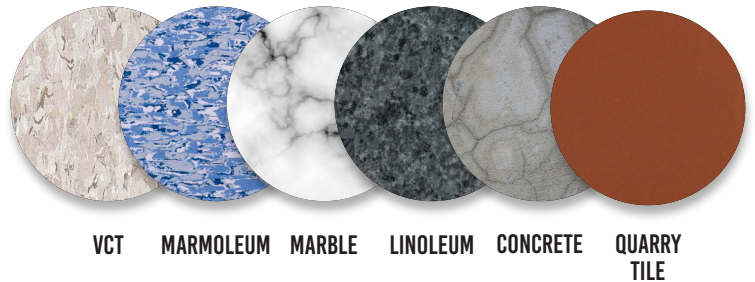

VCT MARMOLEUM MARBLE LINOLEUM CONCRETE QUARRY TILE

TECHNICAL DATA

Description	Polymer emulsion
Appearance	Milky white
Specular Gloss (60°) <small>ASTM D1455-87 (2008)</small>	>85
Viscosity (Brookfield) <small>@ 68°F (20°C)</small>	<10 centipoise
Coverage Rate	2500 to 3000 ft ² /gal 61 to 74 m ² /liter
Dry Time	About 30 minutes
Buffability	Good
Removability <small>ASTM D1792-06</small>	Excellent
VOC <small>40 CFR Part 59 Subpart C</small>	0.85%
Non-Volatile Solids <small>ASTM D2834-95 (2008)</small>	20%
Fragrance	Faintly acetic (non-ammoniated)
Slip Resistance <small>ULTM410</small>	Meets requirements
Shelf Life <small>ASTM D1791-93 (2008)</small>	1 year
Density <small>ASTM D1475-98 (2008)</small>	8.6 lb/gal @ 68°F 1.03 kg/L @ 20°C
Detergent Resistance <small>ASTM D3207-92 (2008)</small>	Excellent
Freeze/Thaw <small>ASTM D3209-93 (2008)</small>	Passes 3 cycles
Container	2.5 US gal/9.5 L (FS packaging) 1.06 US gal/4 L (MPE packaging)